


C10 Pressure Relief Valve

Please note that our high-pressure relief valves are NOT safety valves.

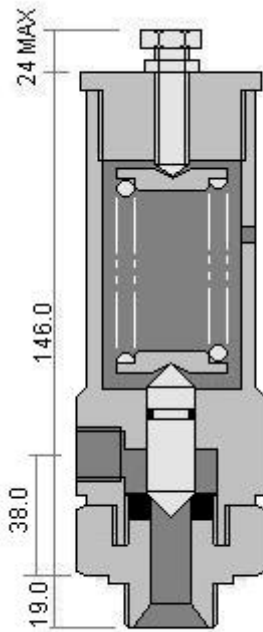

Features and Options

- 10% Opening pressure
- Numerous porting options (standard 1/2" BSP)
- Pneumatic and hydraulic test certification
- Suitable for pneumatic and hydraulic applications
- Manufactured in a range of materials
- Oxygen versions available

Description

For systems using toxic / precious gases or liquids, this spring loaded seat with tapped spill port is used. When installing caution must be given to downstream venting arrangements, outlet port must be piped to a low pressure

Performance and Specifications Details

| | |
|-------------------------|-----------------------------|
| Maximum Inlet Pressure: | 240 bar (3500 psi) |
| Set Pressure Range: | 7~240 bar (100~3500 psi) |
| Orifice Diameter: | 9.5mm (0.375) |
| Standard Material: | Stainless Steel |
| Ports: | 1/2" M in, 3/8" F out (BSP) |