


C11 Pressure Relief Valve

Please note that our high-pressure relief valves are NOT safety valves.

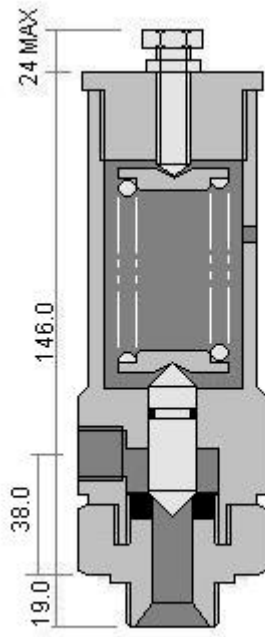

Features and Options

- 10% Opening pressure
- Numerous porting options (standard 1/2" BSP)
- Pneumatic and hydraulic test certification
- Suitable for pneumatic and hydraulic applications
- Manufactured in a range of materials
- Oxygen versions available

Description

For systems using toxic / precious gases or liquids, this spring loaded seat with tapped spill port is used. When installing caution must be given to downstream venting arrangements, outlet port must be piped to a low pressure.

Performance and Specifications Details

Maximum Inlet Pressure:	450 bar (6500 psi)
Set Pressure Range:	35~450 bar (500~6500 psi)
Orifice Diameter:	6.35mm (0.250)
Standard Material:	Stainless Steel
Ports:	1/2" M in, 3/8" F out (BSP)