


## C12 Pressure Relief Valve

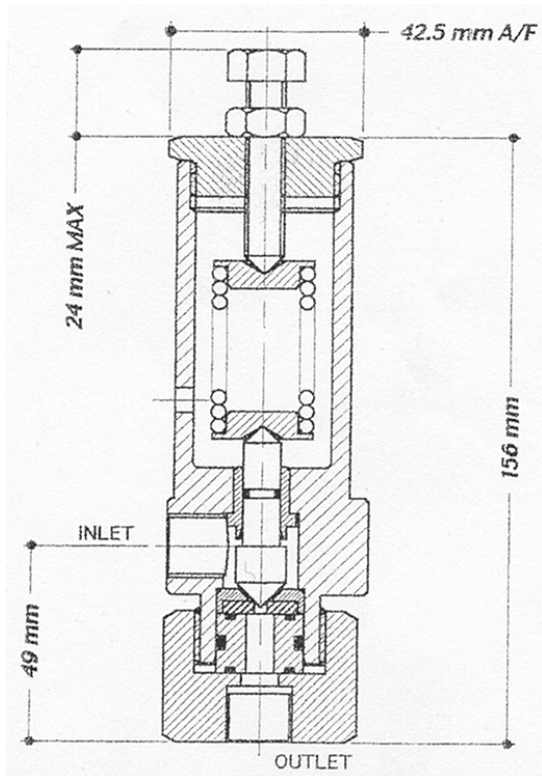

Please note that our high-pressure relief valves are NOT safety valves.

### Features and Options

- 10% Opening pressure
- Numerous porting options (standard 1/2" BSP)
- Pneumatic and hydraulic test certification
- Suitable for pneumatic and hydraulic applications
- Manufactured in a range of materials

### Performance and Specifications Details

Maximum Inlet Pressure:	275 bar (4000 psi)
Set Pressure Range:	20~275 bar (300~4000 psi)
Orifice Diameter:	3.2mm (0.125)
Standard Material:	Stainless Steel
Ports:	1/2" M in, 3/8" F out (BSP)

### Description

For systems using toxic / precious gases or liquids, this spring-loaded seat with tapped spill port is used. When installing caution must be given to downstream venting arrangements, outlet port must be piped to a low pressure.