


# H25 Eco

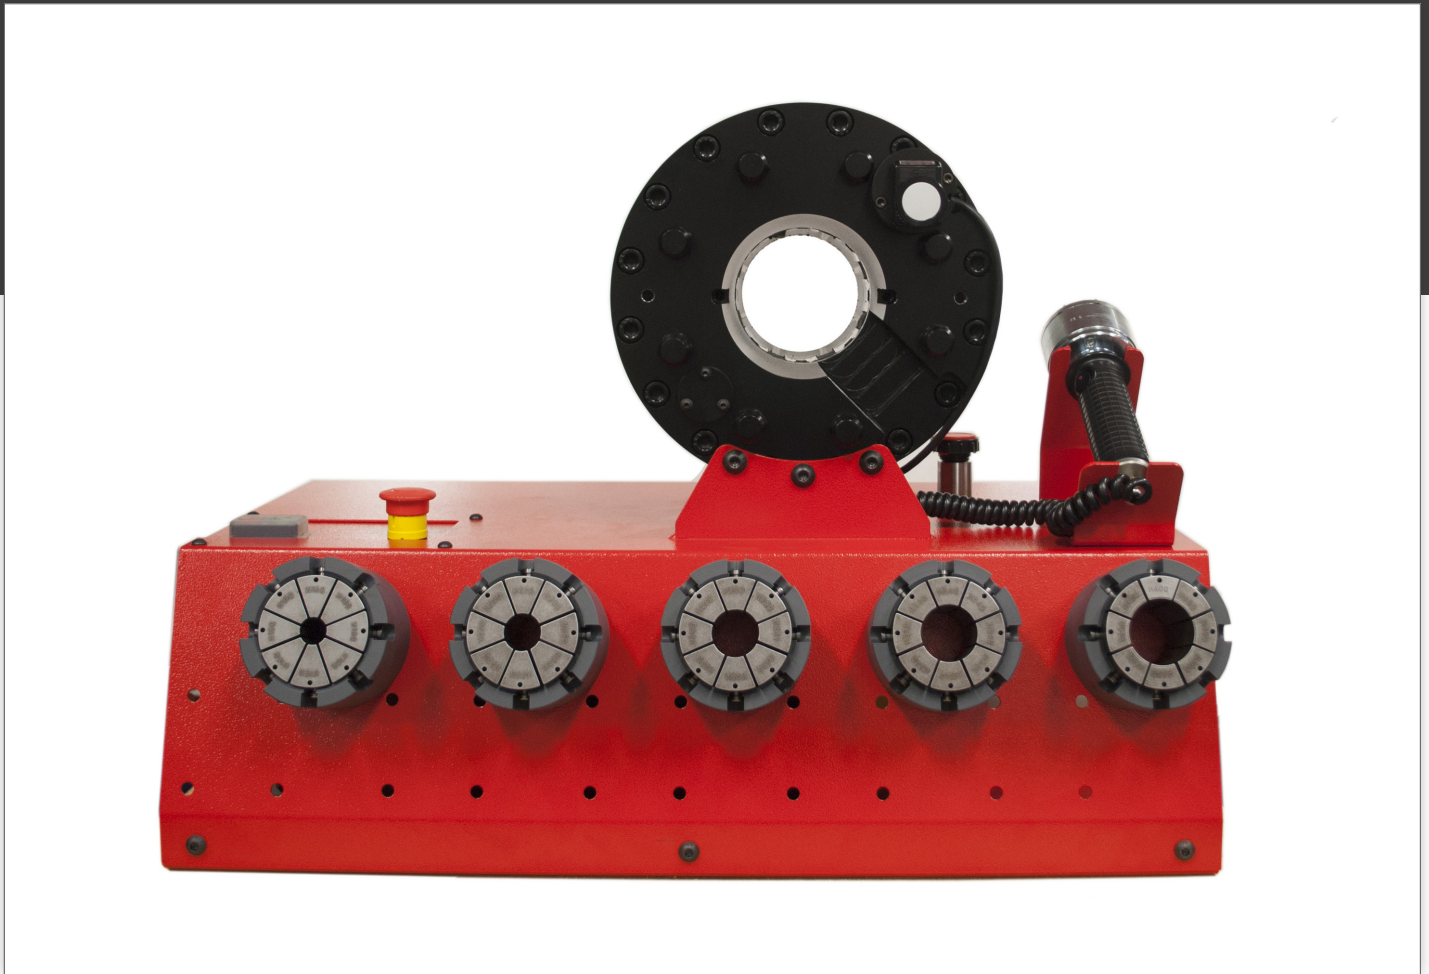

## Electrically operated crimping machine

Our most economic electric power machine, available with up to 10 Quick Change pots.

- Hose capacity 3/16" - 1 1/4" (4 wire)
- Simple dial adjusted calibrator
- Integrated quick change system.



Simple dial adjusted calibrator



Integrated Quick Change system




### Quick Change

Integrated Quick Change system with an electro magnetic tool for easy storage and changing of dies.



### Voltages

Available in a wide range of voltages (ask our sales team for specific voltage requirements)



### Delivery

Our distributors stock machines worldwide for fast delivery to you.

## Product features and specifications

Hose capacity	3/16" - 1" (4 wire)
Calibration	Simple dial adjusted calibrator
Max opening (without dies)	105 mm
Swaging force	1750kN
Max cycle time (O-C) / (C-O)	3 Sec / 7.5 Sec
Voltages 3 phase (Different voltages available)	220/240-380/440 50Hz OR 225/280-440/480 60Hz
Voltages 1 phase (Different voltages available)	220/240 50Hz
Additional die sets available	1 piece, Freon, PTFE & other
Packed Dimensions / Net Weight / Gross Weight (Data given without weights of extras)	790 x 600 x 900 mm / 123 Kgs / 142 Kgs

For more information about this product, including spares, service and videos, visit our website

[www.hydralok.net](http://www.hydralok.net)